

Search UniFi products

- Cloud Gateways
- Switching
- WiFi
- Camera Security
- Door Access
- Integrations
- Advanced Hosting
- Accessories


Bullet > G6 Pro Bullet

Datasheet

In The Box

Marketing Images

Installation Guide

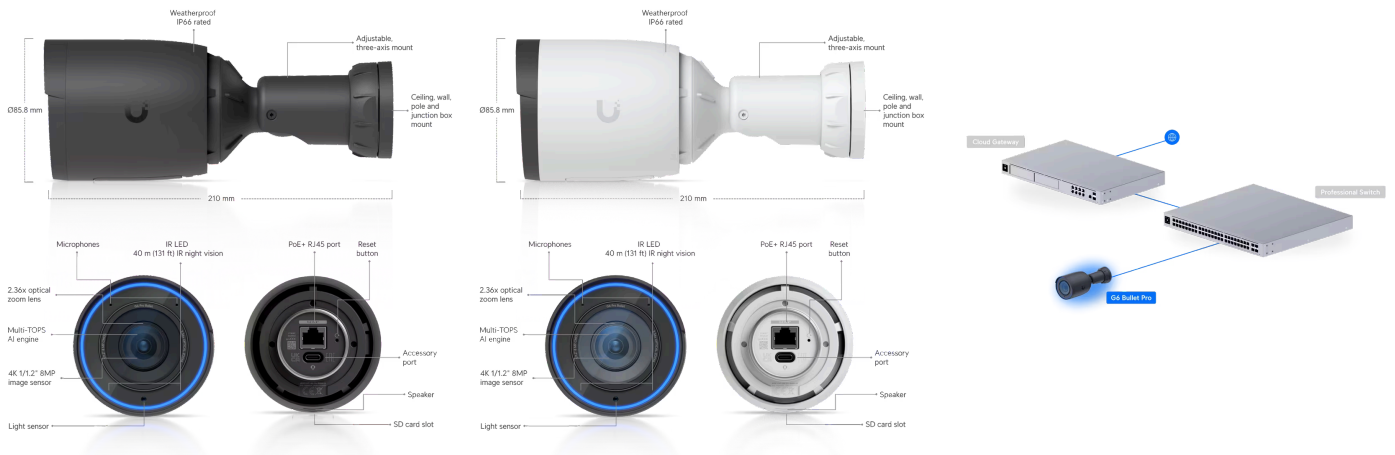

Overview

Dimensions	Without mount: Ø85.8 x 106.2 mm (Ø3.4 x 4.2") With wall mount: Ø85.8 x 210 mm (Ø3.4 x 8.3")
IR Night Vision	40 m (131 ft) Up to 60 m (197 ft) with Vision Enhancer
Zoom Mode	2.36x Optical
Face Recognition	✓
License Plate Recognition	✓
Smart Detections (People, Vehicles, Animals)	✓
Resolution	4K
Field of View	Wide: H: 113.8°, V: 61.9°, D: 134° Tele: H: 45.5°, V: 25.8°, D: 52°
Audio	Two-way audio
Weatherproofing	IP66
Tamper Resistance	IK04
Mounting	Wall, Ceiling, Pole mount (Included) Junction Box, Angled Base (Optional)

Performance

Networking Interface	GbE RJ45 port
Video	
Image Settings	Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay, HDR
Max. Frame Rate	30 FPS
Resolution	8MP 3840 x 2160 (16:9)


## Optics

Sensor	1/1.2" 8MP
Lens	F 5.9-13.8 mm; f/1.5-f/2.9
Night Mode	Built-in adaptive IR LED illumination and IR cut filter

## ^ Hardware

Max. Power Consumption	15W
Supported Voltage Range	37-57V DC
Power Method	PoE+
Processor	Quad core Arm® Cortex®-A53 based chip
Pole Mount Diameter	1.5-2" (38-50 mm)
Weight	Without mount: 755 g (1.7 lb) With mount: 980 g (2.2 lb)
Enclosure Material	Polycarbonate, aluminum alloy
Mount Material	Wall mount: aluminum alloy, polycarbonate Pole mount: aluminum alloy
Expansion Slot	MicroSD card
Button	(1) Factory-reset
Ambient Operating Temperature	-20 to 50° C (-4 to 122° F)
Ambient Operating Humidity	0 to 90% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC

### Stay in Touch

[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.