

Tech Specs

UniFi UISP Branding

UniFi Cloud Gateways Switching WiFi Camera Security Door Access CloudKeys & Gateways Power Tech New Integrations Accessories



Camera Security > [G5 PTZ](#)

Datasheet

In The Box

Marketing Images

Installation Guide

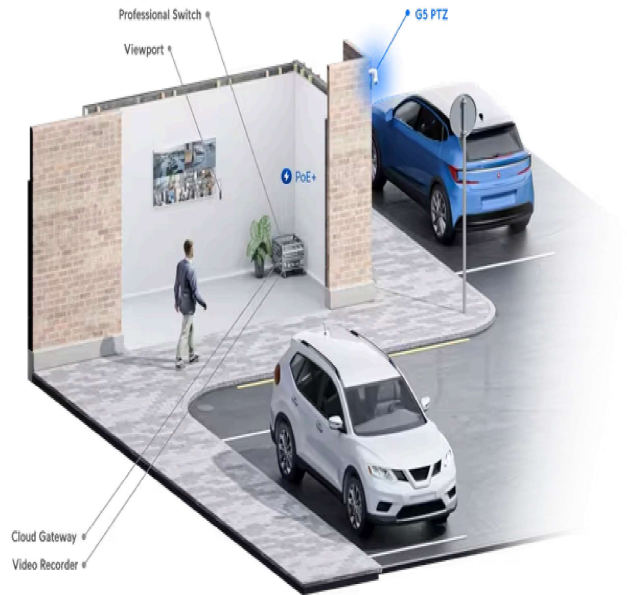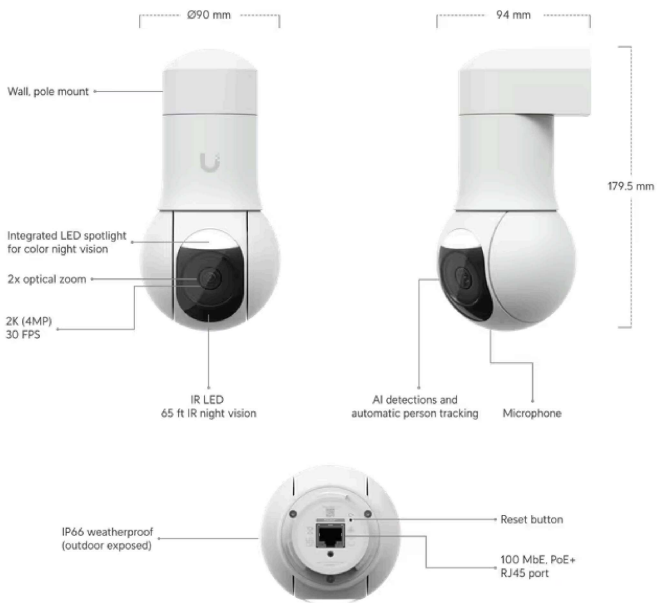

Mechanical

Dimensions	Without mount: Ø90 x 152.5 mm (Ø3.5 x 6") With mount: 90 x 94 x 179.5 mm (3.5 x 3.7 x 7")
Weight	Without mount: 580 g (1.3 lb) With mount: 650 g (1.4 lb)
Enclosure material	Aluminum alloy, polycarbonate
Mount material	Wall mount: polycarbonate Pole mount: aluminum alloy
Pole mount diameter	38–50 mm (1.5–2") on pipe outer diameter
Weatherproofing	IP66
Resistance	IK04

Optics

Sensor	5MP 1/2.7" CMOS
Lens	F 3.42–6.85 mm; f/1.85–f/2.4
View angle	16:9 Wide: H: 99.7°, V: 51.9°, D: 121° 16:9 Tele: H: 45.5°, V: 25.4°, D: 52.4°
Night mode	Built-in IR & white LED illumination with IR cut filter
IR distance	20 m (65 ft)

IR limitation Keep distance from top/side ≥ 60 cm (2 ft)

Video

Resolution 4MP 2688 x 1512 (16:9)

Max. frame rate 30 FPS

System

Networking interface 10/100 MbE RJ45 port

Max. power consumption 14W

Power method PoE+

Supported voltage range 37-57V DC

LEDs R/G/B/W: link, activity
Floodlight: 400 lm

Button Factory reset

Mounting Wall, pole mount (Included)
Conduit adapter, surface, in-ceiling, pendant, corner mount (Optional, sold separately)

Ambient operating temperature -30 to 45° C (-22 to 113° F)

Ambient operating humidity 0 to 90% noncondensing

Certifications FCC, IC, CE

Audio

Microphone Yes (Can be disabled)

Software

Web application UniFi Protect

Mobile app UniFi Protect iOS™ and Android™

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.